
4660 136th Avenue, Holland, MI 49424 www.mwwatermark.com

Office 616.399.8850 Fax 616.399.8860


FILTER PRESS FEED PUMPS

100-PSI AIR-OPERATED DIAPHRAGM PUMP PERFORMANCE CURVES

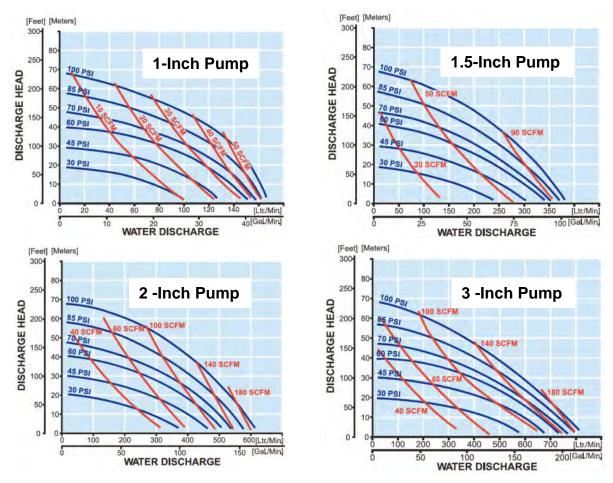

Standard materials of construction are either cast iron or polypropylene with Santoprene diaphragms. All curves are based on 1-ft flooded suction, Fluid viscosity 1 cps.

Reading AOD Pump Curves



- 1. Determine pump requirements.
 In this case 90 GPM at 50-ft TDH.
- 2. Point is where the pump GPM and TDH intersect.
- 3. Follow the pressure curve to determine the air inlet pressure required.
- 4. Follow the nearest SCFM curve to determine the air volume requirements.